


MODEL: OT150-12 SUPER PLUS (VRLA GEL)/CD-A



Plane Chart:


Unit:(mm) Terminal type:(T3)

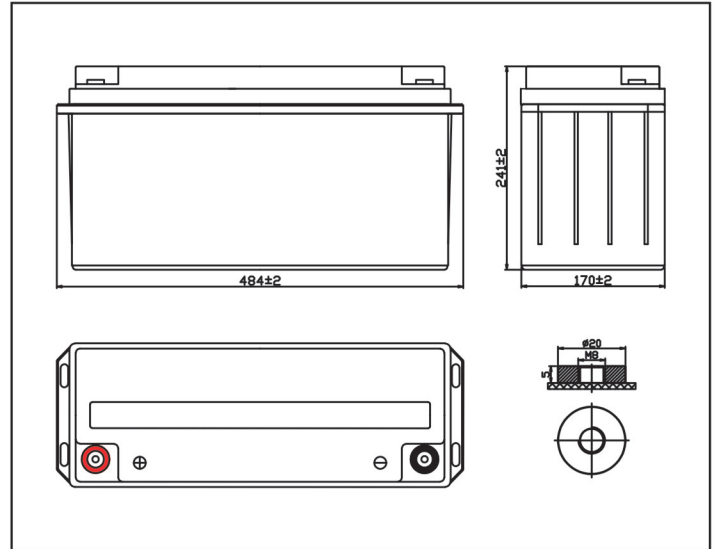


Parameter Chart:

Volts		12V	
Capacity(25°C)	10 hours rate (15A)	150Ah	
Discharge Current Testing (25°C)	1 hours rate (82.5A)	86Ah	
	3 hours rate (37.5A)	117Ah	
Internal Resistance	Full Charged Battery 25°C		4mΩ
Capacity Affected By Temperature	40°C	104%	
	25°C	100%	
	0°C	83%	
	-15°C	65%	
Residual Capacity (25°C)	Capacity After 3 Months Storage		91%
	Capacity After 6 Months Storage		82%
	Capacity After 12 Months Storage		65%
Charge (Constant Voltage)	Cycle (25°C)	Initial Charging Current Less Than 45A Voltage 14.5~14.9V	
	Float (25°C)	Charge Voltage 13.6~13.8V	
Weight (Approx)		44Kg	

Residual Capacity

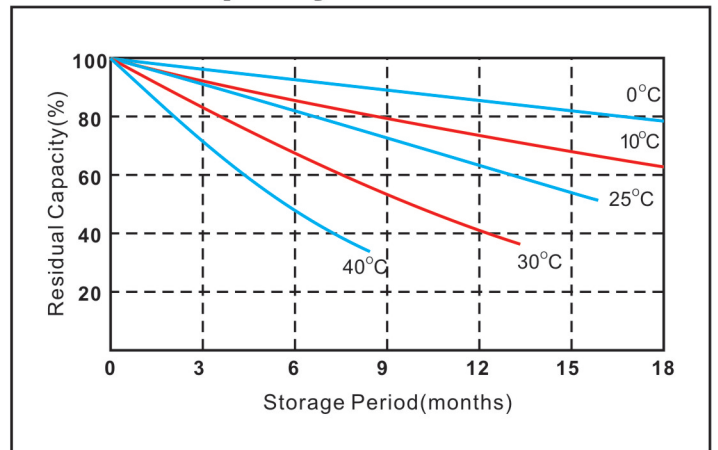


Discharge Current 25°C

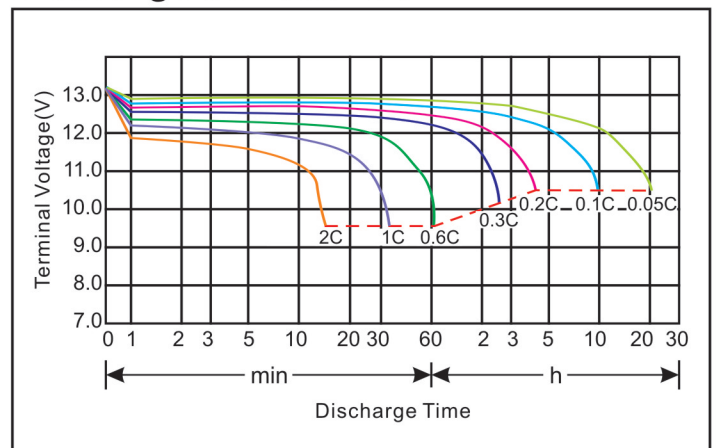


★The above are average and data obtained from the first 3 charge/discharge cycles. These are not minimum values.

MODEL:OT150-12 SUPER PLUS (VRLA GEL)/CD-A

Constant voltage charging characteristics

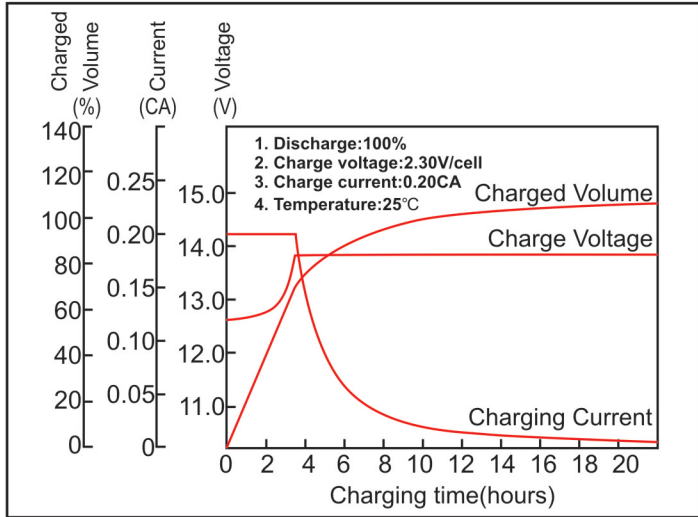

Cycle service life in relation to the depth of discharge

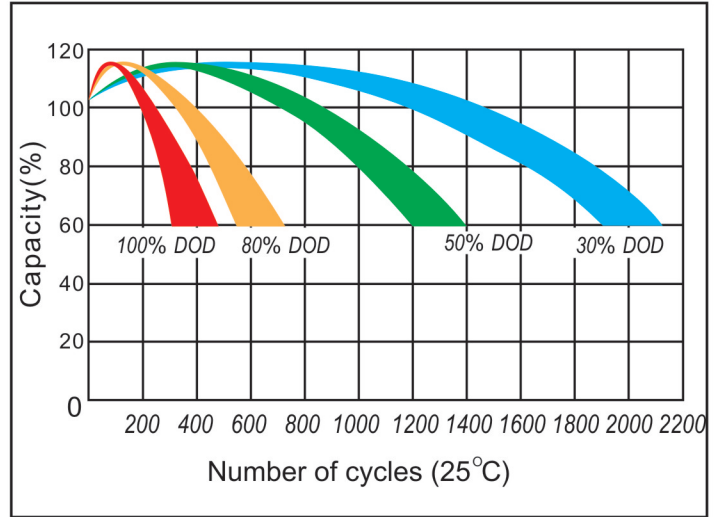

Constant Current Discharge Characteristics (A, 25°C)

F.V/Time	15min	30min	60min	2h	3h	4h	5h	8h	10h	20h
9.60V	259.9	152.0	84.3	50.8	38.2	29.4	23.5	17.1	15.2	7.8
10.2V	250.3	145.9	81.3	50.0	37.9	28.4	22.6	16.3	15.1	7.7
10.5V	239.0	142.6	78.4	49.1	36.0	27.5	21.8	15.5	15.0	7.7
10.8V	222.7	136.1	74.2	46.8	34.5	26.1	20.9	14.6	15.0	7.6

Constant Power Discharge Characteristics (Watt, 25°C)

F.V/Time	15min	30min	60min	2h	3h	4h	5h	8h	10h	20h
9.60V	2806.6	1702.5	969.9	584.2	442.9	340.9	273.0	198.0	176.9	90.4
10.2V	2753.1	1649.2	943.1	579.9	439.4	329.2	262.4	188.6	176.9	90.2
10.5V	2628.6	1625.8	917.0	574.3	417.1	318.7	253.1	179.3	175.7	90.2
10.8V	2472.0	1565.7	876.0	551.8	400.7	302.3	242.5	169.9	175.3	89.0

Capacity Factors With Different Temperature

Battery Type		-20°C	-10°C	0°C	5°C	10°C	20°C	25°C	30°C	40°C	45°C
GEL Battery	12V	50%	70%	83%	85%	90%	98%	100%	102%	104%	105%

★The above are average and data obtained from the first 3 charge/discharge cycles. These are not minimum values.